


SPECIFICATIONS

| | |
|--------------------------|--|
| Height | 23.875 in. |
| Width | 23.875 in. |
| Area | 4 sq. ft. (nominal) |
| Features | Recess 0.25 in. from tile face |
| Collection | Feather-Light |
| Thickness | 0.013 in. |
| Weight | 6.4 oz. (0.10 lb. per sq. ft.) |
| Material | Laminated rigid vinyl |
| Color | Copper |
| Finish | Brushed Metallic |
| Recessed Lighting | Yes, this style can be used with recessed lighting |
| Perforation | Available |

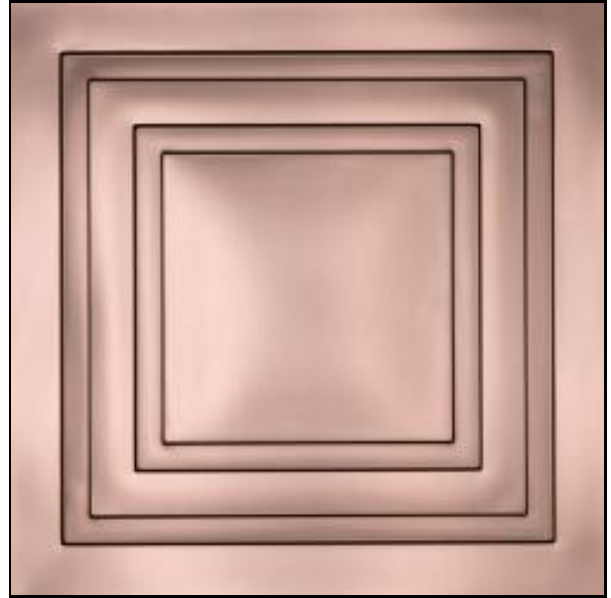

INSTALLATION

| | |
|--------------------------|--|
| Installation Type | Standard drop (15/16 to 1 in.) |
| Borders | Yes, this style can be trimmed for use along borders |
| Direct Mount Grid | Yes, this product can be used with direct mount grid |
| Temp. Warning | Not recommended for installation where ceiling temperatures exceed 120°F |

CERTIFICATIONS, LISTINGS, APPROVALS

| | |
|------------------------------|---|
| Drop-out Installation | Yes, approved for installation <u>beneath</u> fire suppression sprinklers |
| | IAPMO Uniform ES Listing Report 5021 |
| | IAPMO Uniform ES Evaluation Report 0310 |
| | FM Class 4651 |
| | FM Certificate of Compliance |

| | |
|---------------------------|---|
| Fire Ratings | NFPA 13 |
| | Class A |
| | Euroclass Rating B-s2-d0 |
| | Flame Class V-0 |
| Code Compliance | 2015, 2012, 2009, and 2006 IBC |
| Indoor Air Quality | Greenguard Gold Certified; low-VOC; dust and fiber free |
| Food Preparation | FDA and USDA Compliant |
| Moisture | FEMA Class 4 Material; waterproof; washable |
| Sustainability | 100% recyclable |

PERFORMANCE

| | |
|----------------------------|---|
| Noise Reduction | NRC 0.25 |
| | NRC 0.25 with perforations |
| | NRC 0.30 with AcoustoTherm |
| | NRC 0.40 with perforations and AcoustoTherm |
| | NRC 0.50 with Soniguard |
| | NRC 0.85 with perforations and Soniguard |
| Sound Transmission | STC 10 |
| | STC 11 with AcoustoTherm |
| | STC 13 with Soniguard |
| Ceiling Attenuation | CAC 14 |
| | CAC 20 with Soniguard |
| Light Reflectance | 57.46% |
| Thermal Insulation | R-0.012 |
| | R-0.80 with AcoustoTherm |
| | R-6.0 with Soniguard |