


## SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| <b>Height</b>     | 23.875 in.                      |
| <b>Width</b>      | 23.875 in.                      |
| <b>Area</b>       | 4 sq. ft. (nominal)             |
| <b>Features</b>   | Project 0.62 in. from tile face |
| <b>Collection</b> | Feather-Light                   |
| <b>Thickness</b>  | 0.013 in.                       |
| <b>Weight</b>     | 6.4 oz. (0.10 lb. per sq. ft.)  |
| <b>Material</b>   | Rigid vinyl                     |
| <b>Color</b>      | White                           |
| <b>Finish</b>     | Satin                           |

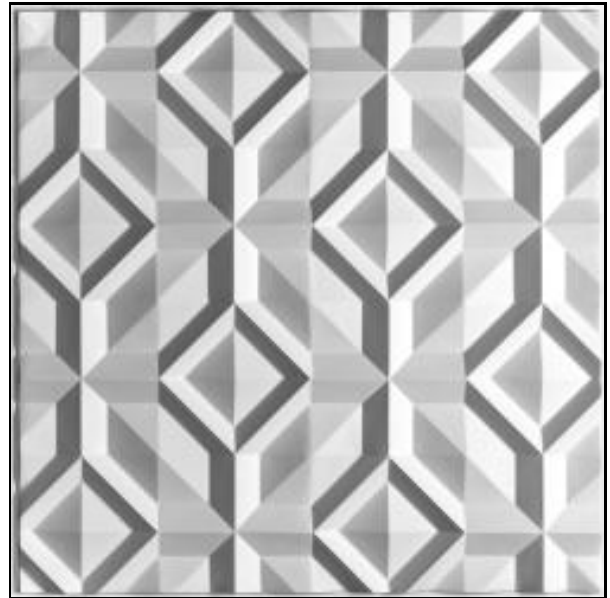

## INSTALLATION

|                          |  |
|--------------------------|--|
| <b>Installation Type</b> | Standard drop (15/16 to 1 in.)   |
| <b>Borders</b>           | No, border tiles may be required   |
| <b>Direct Mount Grid</b> | Yes, this product can be used with direct mount grid                     |
| <b>Temp. Warning</b>     | Not recommended for installation where ceiling temperatures exceed 120°F |

## CERTIFICATIONS, LISTINGS, APPROVALS

|                              |   |
|------------------------------|---|
| <b>Drop-out Installation</b> | Yes, approved for installation <u>beneath</u> fire suppression sprinklers<br>IAPMO Uniform ES Listing Report 5021<br>IAPMO Uniform ES Evaluation Report 0310<br>FM Class 4651<br>FM Certificate of Compliance<br>NFPA 13<br>UL File R4036 |
|------------------------------|---|

---

|                           |   |
|---------------------------|---|
| <b>Fire Ratings</b>       | Class A<br>Euroclass Rating B-s2-d0<br>Flame Class V-0  |
| <b>Code Compliance</b>    | 2015, 2012, 2009, and 2006 IBC                          |
| <b>Indoor Air Quality</b> | Greenguard Gold Certified; low-VOC; dust and fiber free |
| <b>Moisture</b>           | FEMA Class 4 Material; waterproof; washable             |
| <b>Sustainability</b>     | 100% recyclable   |

## PERFORMANCE

|                            |   |
|----------------------------|---|
| <b>Noise Reduction</b>     | NRC 0.25<br>NRC 0.30 with AcoustoTherm<br>NRC 0.50 with Soniguard |
| <b>Sound Transmission</b>  | STC 10<br>STC 11 with AcoustoTherm<br>STC 13 with Soniguard       |
| <b>Ceiling Attenuation</b> | CAC 14<br>CAC 20 with Soniguard                                   |
| <b>Light Reflectance</b>   | 90.44%  |
| <b>Thermal Insulation</b>  | R-0.012<br>R-0.80 with AcoustoTherm<br>R-6.0 with Soniguard       |