


SPECIFICATIONS

Height	23.875 in.
Width	23.875 in.
Area	4 sq. ft. (nominal)
Features	Project 0.22 in. from tile face
Collection	Signature
Thickness	0.030 in.
Weight	12.8 oz. (nominal)
Material	98% recycled laminated rigid vinyl
Color	Bronze
Finish	Brushed Metallic
Recessed Lighting	Yes, this style can be used with recessed lighting

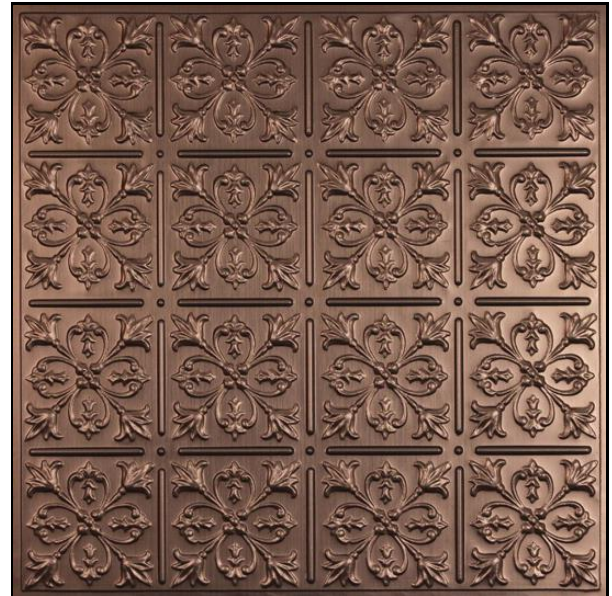

INSTALLATION

Installation Type	Standard drop (15/16 to 1 in.) Slimline drop (9/16 in.) Refacing Glue-up (butt joint)
Borders	Yes, this style can be trimmed for use along borders
Strips Required	Yes, decorative strips or smooth strips required for glue-up installations
Direct Mount Grid	Yes, this product can be used with direct mount grid
Temp. Warning	Not recommended for installation where ceiling temperatures exceed 120°F
Sag Warning	Some minor sagging can occur when used in full-size grid squares

CERTIFICATIONS, LISTINGS, APPROVALS

Drop-out Installation	Yes, approved for installation <u>beneath</u> fire suppression sprinklers
------------------------------	---

	IAPMO Uniform ES Listing Report 5021
	IAPMO Uniform ES Evaluation Report 0310
Fire Ratings	Class A
	Euroclass Rating B-s1-d0
	Flame Class V-0
Code Compliance	2015, 2012, 2009, and 2006 IBC
Indoor Air Quality	Greenguard Gold Certified; low-VOC; dust and fiber free
Moisture	FEMA Class 4 Material; waterproof; washable
Sustainability	Made from 98% recycled material
	100% recyclable

PERFORMANCE

Noise Reduction	NRC 0.15
	NRC 0.30 with Soniguard
Sound Transmission	STC 15
	STC 15 with AcoustoTherm
	STC 18 with Soniguard
Ceiling Attenuation	CAC 21
	CAC 26 with Soniguard
Light Reflectance	11.43%
Thermal Insulation	R-6.0 with Soniguard