


SPECIFICATIONS

Height	23.875 in.
Width	23.875 in.
Area	4 sq. ft. (nominal)
Features	Recess 0.50 in. from tile face
Collection	Feather-Light
Thickness	0.013 in.
Weight	6.4 oz. (0.10 lb. per sq. ft.)
Material	Transluminous rigid vinyl
Color	Clear
Finish	Gloss
Perforation	Available

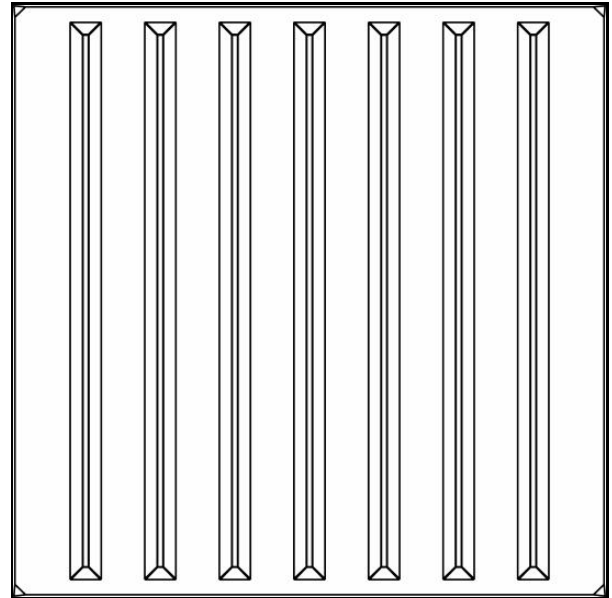

INSTALLATION

Installation Type	Standard drop (15/16 to 1 in.)
Borders	Yes, this style may be trimmed for use along borders
Direct Mount Grid	Yes, this product may be used with direct mount grid

CERTIFICATIONS, LISTINGS, APPROVALS

Drop-out Installation	Yes, approved for installation <u>beneath</u> fire suppression sprinklers IAPMO Uniform ES Listing Report 5021 IAPMO Uniform ES Evaluation Report 0310 FM Class 4651 FM Certificate of Compliance NFPA 13 CertMark Evaluation Report CMI-ER31001
------------------------------	--

Fire Ratings	Class A Euroclass Rating B-s2-d0 Flame Class V-0
Code Compliance	2015, 2012, 2009, and 2006 IBC
Indoor Air Quality	Greenguard Gold Certified; low-VOC; dust and fiber free
Food Preparation	FDA and USDA Compliant
Moisture	FEMA Class 4 Material; waterproof; washable
Sustainability	100% recyclable

PERFORMANCE

Noise Reduction	NRC 0.25 NRC 0.30 with AcoustoTherm
Sound Transmission	STC 10 STC 11 with AcoustoTherm
Ceiling Attenuation	CAC 14
Light Transmittance	87.67%
Thermal Insulation	R-0.012 R-0.80 with AcoustoTherm